


SCLIGHT

Dear customer, thank you for purchasing our product. Please read the following instructions carefully and follow them to serve you safely and to your full satisfaction. This will prevent misuse or damage. Avoid unprofessional handling of this appliance and always observe the electrical appliance usage guidelines. Keep the instruction manual carefully. For use in the home or indoors. This product should only be used by an adult. The device can be used in areas such as bathrooms (degree of protection IP24).

TECHNICAL PARAMETERS

Maximum power - 1200 W Power supply - 220-240V, 50-60Hz Degree of protection - IP24 Heating stages - 2

DESCRIPTION OF EQUIPMENT




SAFETY NOTICE

Follow the following instructions for installation.

- 1. Children (but at least 8 years of age) and persons with reduced physical, sensory or mental abilities or lack of experience and knowledge may use the appliance if they are supervised by a responsible person or have been instructed in the safe use of the appliance and understand the dangers involved.
- 2. If the power cord is damaged, it must be replaced by the manufacturer or by qualified persons to avoid danger.
- 3. Do not cover the device with anything, as this will cause overheating and a fire hazard.
- 4. The device must not be placed immediately below the socket.
- 5. Do not use the device in the immediate vicinity of a bathtub, shower, sink or swimming pool.
- 6. Do not use the device if:
 - you dropped the device
 - there are visible signs of damage to the device
- 7. Some parts of this product can be very hot and cause burns.
- 8. Do not use this device in small rooms if they are occupied by persons who are unable to leave the room on their own, unless constant supervision is provided.
- 9. To reduce the risk of fire, keep fabrics, curtains or any other combustible material at least 1 m away from the appliance.

WALL MOUNTING

- 1. Do not place the device directly under the socket.
- 2. The device must be installed at least 1.8m above the floor.
- 3. The device must be installed at least 0.3m from the ceiling and 0.5m from the adjacent wall.
- 4. If the equipment is installed in the bathroom, the user must not touch or be within reach of the switches and controls in the bath or shower. The heater should be installed at least 1m away from the bath/shower.
- 5. Do not install the appliance so that hot air blows directly onto the wall or adjacent objects.
- 6. Position the device according to the spacing requirement shown in Figure 2 below.



INSTALLATION

- 1. Loosen and unscrew the screw on the top and bottom of the wall bracket (see Figure 3a and 3b) and remove the wall bracket cover (see Figure 3b).
- 2. After selecting the location of the device placement, drill four holes in the wall. Use a paper tape measure to locate the drill holes for mounting (see Figure 3c). Mark a cross in the center of the hole for more accurate drilling.
- 3. Now remove the gauge and drill the holes.
- 4. Insert the four plastic dowels included in the package into the holes (see figure 3d).
- 5. Lift and orient the device so that the grid is facing you. Tilt the radiator all the way down.
- 6. Attach the infrared heater to the wall by pushing the two screws provided through the two holes on the top of the wall bracket and screwing them in (See Figure 3e). We recommend using a shorter screwdriver to make it easier to get into the construction space.
- 7. Tilt the radiator all the way up, push the other two screws through the holes on the underside of the wall bracket and screw them in. The heater is now securely fastened to the wall. (See Figure 3f).
- 8. Replace the cover and secure it with the two screws.

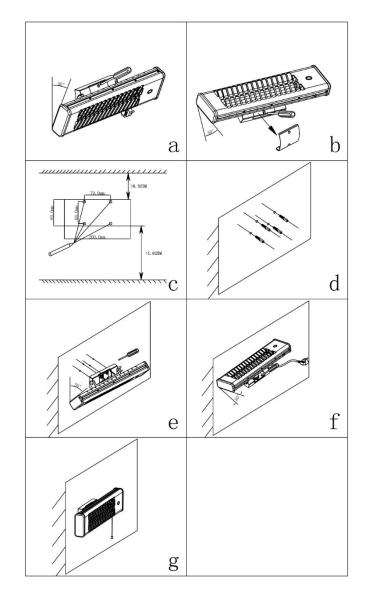


Figure 3

IMPORTANT

During installation, extra care must be taken when touching the heating elements, as this could cause staining which would reduce heat radiation. Once the heater has been installed, the supply cable must not touch the metal cover during use.

STARTING AND CONTROLLING THE DEVICE

NOTE: It is normal for certain odours and fumes to be released when the appliance is first switched on, or when it is switched on after a long period of disuse. This smell will disappear once the appliance has been switched on for a short period of time.

Switch positions:

"0" to switch off the heater "1" for 600 W heating setting "2" for 1200 W heating setting

The position can be checked on the indicator (see figure 1).

MAINTENANCE AND CLEANING

- 1. Disconnect the appliance from the power supply before performing any maintenance.
- 2. If the heater needs cleaning, wipe the external surfaces of the appliance with a damp cloth. Do not rinse them directly with water. Be sure to unplug the power plug before cleaning.

When cleaning, be careful not to touch the silicon heating elements.

The product has been issued with a CE declaration of conformity in accordance with the applicable regulations. On request from the manufacturer: info@solight.cz, or download at www.solight.cz



At the end of its useful life, the equipment must be disposed of in an environmentally friendly manner at a designal



Solight Holding, s.r.o., Na Brně 1972, Hradec Králové 500 06, Czech Republic.